




# Tengda S5 Plus Rear Camera Replacement

This guide will show you how to replace the rear camera on the Tengda S5+.

Written By: Jholmesford

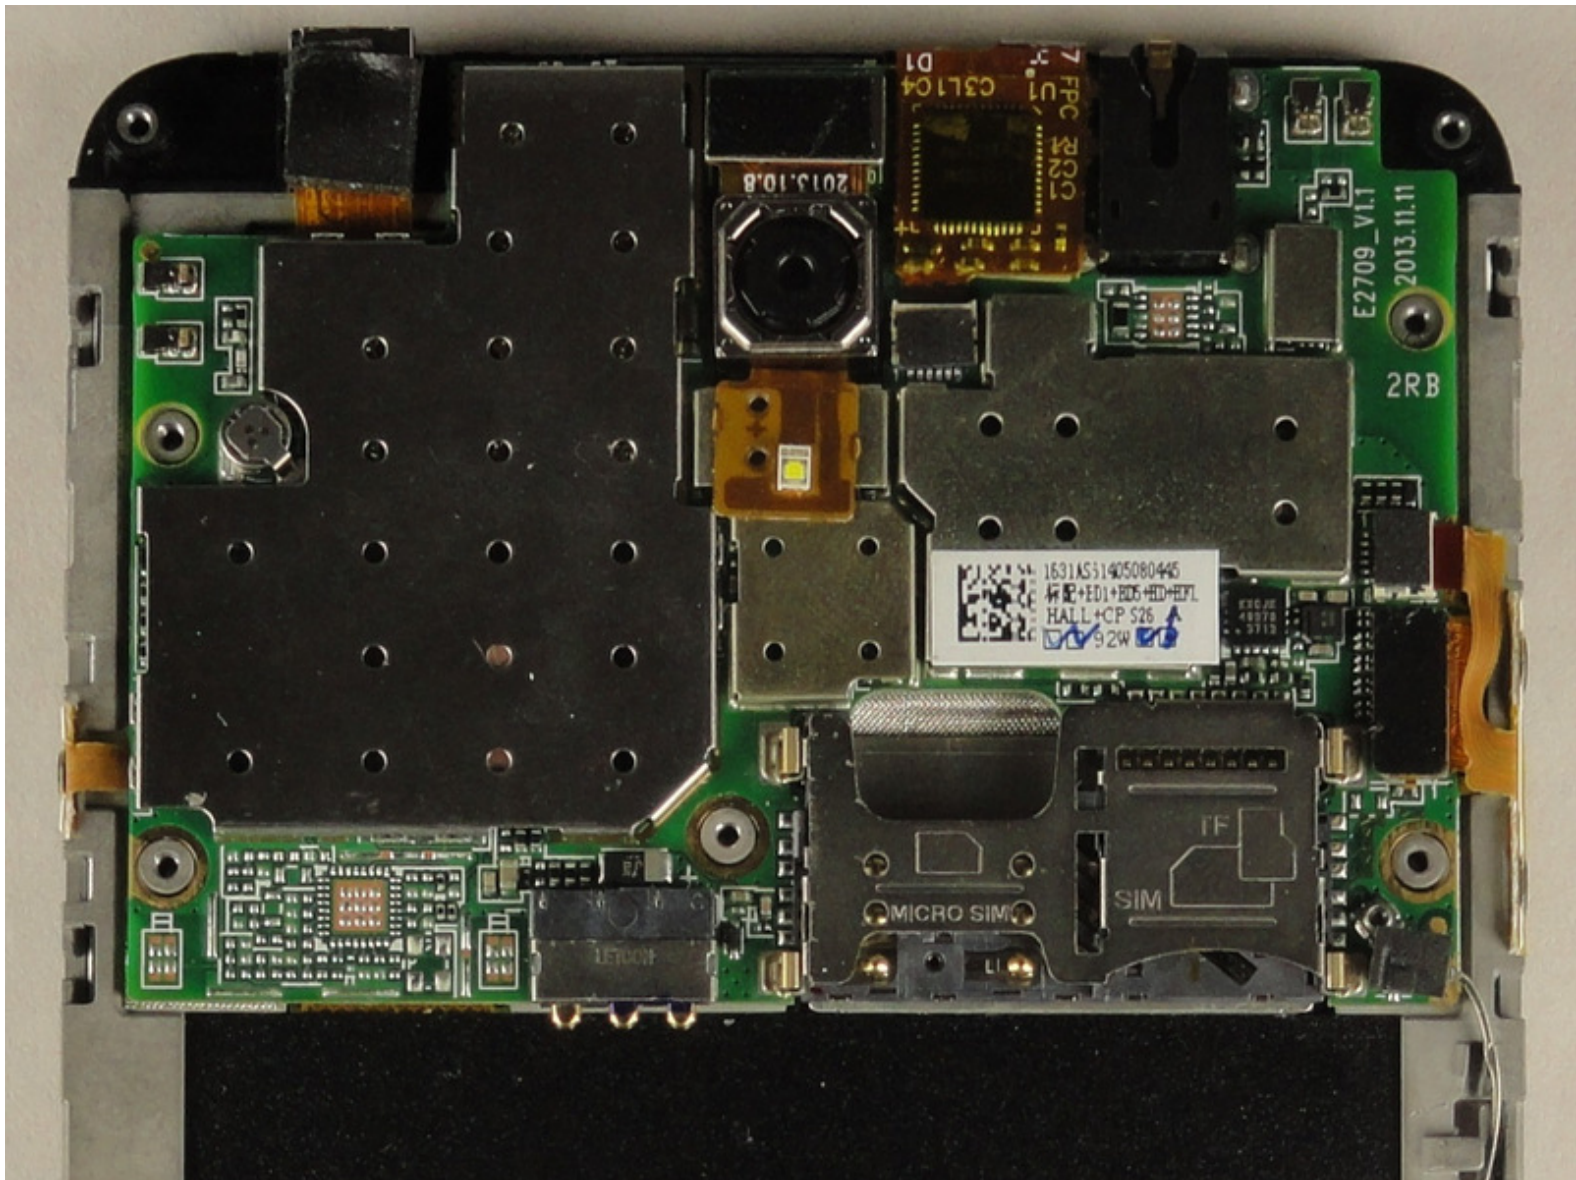

## INTRODUCTION

Use this guide in order to replace the rear camera on the Tengda S5+.

---



### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Back Panel



- Place the phone screen-side down.

## Step 2



- Using your fingernail or any prying tool (we used the Metal Spudger), begin to pry away the back panel starting at the bottom of the phone.
- Continue to work your way around the phone counterclockwise until you can pull the back cover off.



## Step 3 — Battery



- Remove the battery by placing your thumb in the slot, pushing the battery up and pulling it out.

## Step 4 — Rear Camera




- Unscrew the twelve 3 mm screws from the back panel using a Phillips #00 screwdriver.
- ⓘ Keep these screws in a safe place. They are very small and easy to lose.

## Step 5




- Using the plastic opening tool, create space between the front screen and the metal casing.
- Once the screen is separated from the back panel, pull the two pieces apart.

## Step 6

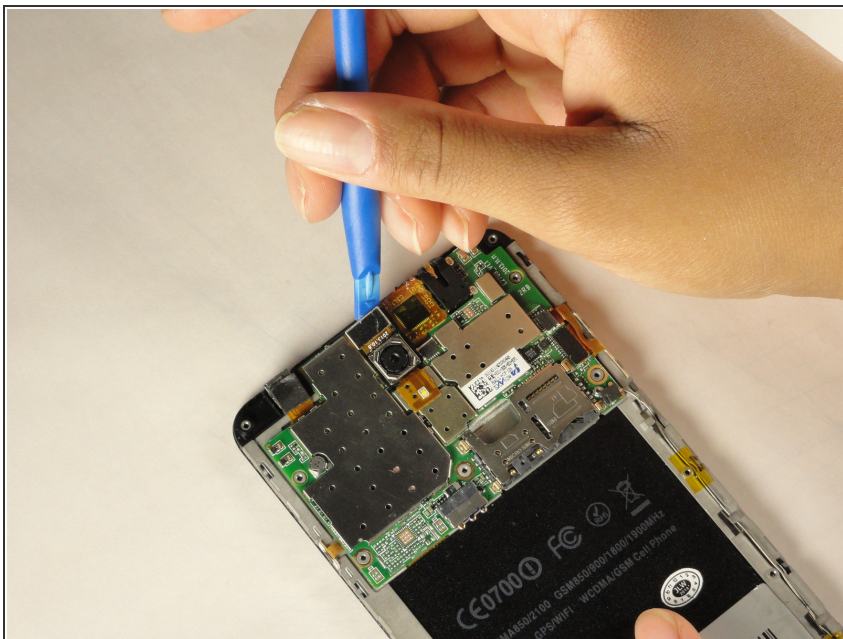


- Place the phone facing screen down.
  - Using the plastic prying tool, gently disconnect the black connector cable.
- i** The connector cable should easy snap out with little force.

## Step 7

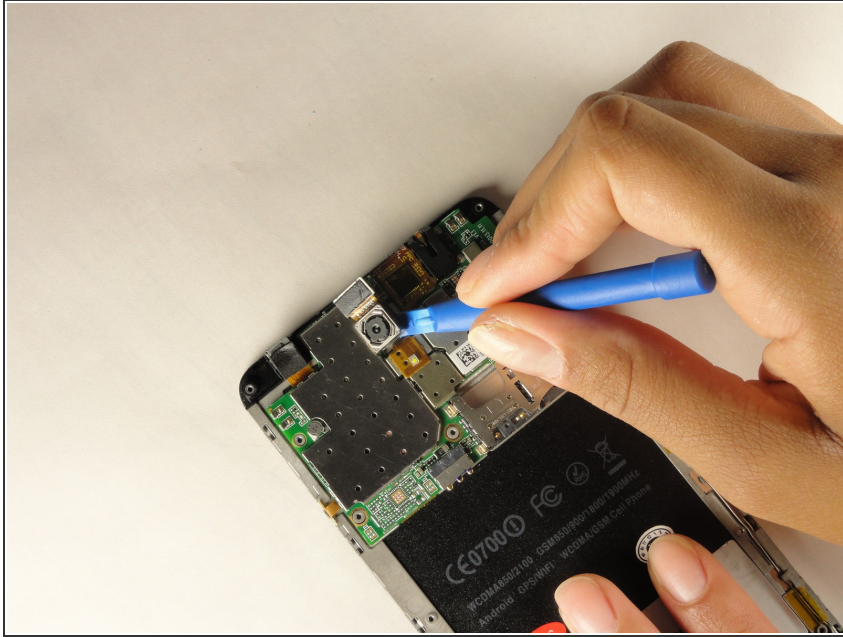

- Using the plastic prying tool, pry the camera from the tape holding it in place.

 Be careful not to rip the tape.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 05:26:22 AM.